


Assembly Instructions

Snowman

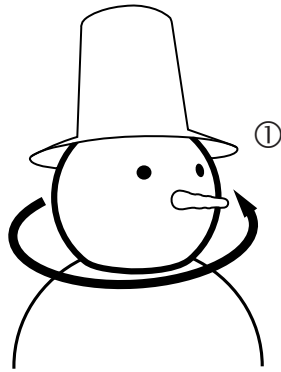

Important safety notice:

Before disassembling the snow man, pull the electric plug or ensure that the electric current to the snow man is interrupted.

Warning!

Note markings when assembling the snow man. The markings should always be aligned to each other.

To exchange lamps

- ① Screw off the head of the snowman (ball Ø 350 mm) counter-clockwise. It is now possible to exchange the lamp (7 Watt).
- ② Loosen nuts with a fork wrench (SW 8) and remove washer. Lift base.
- ③ Pull in the brown cable loop to the inside.
- ④ Lift out the base. It is now possible to exchange the lamp (15 Watt).
- ⑤ Pull the white plug at the end of the brown connecting cable out of the white coupler by pressing with your finger (click-fastener).
- ⑥ Unscrew and remove the brass safety screw from the safety plate. Screw off the belly of the snow man (ball Ø 550 mm) counter-clockwise.
- ⑦ Loosen nuts with a fork wrench (SW 8) and remove washers. Lift base.
- ⑧ Pull in the brown cable loop to the inside.
- ⑨ Lift out the base. It is now possible to exchange the lamp (23 Watt).

To replace lamps

- ⑦ Unscrew filter counter-clockwise from the adapter,
- ⑧ exchange lamp, screw filter back onto the adapter. Holes in the filter should face the buttons or the nose; observe markings.

To assemble snow man, proceed in reverse order.

